

JETPAN


Jetpan – speed gate with high glass retractable flaps and reliable mechanism with brushless motor. The combination of high glass flaps along with safety sensors prevents climbing over the turnstile and perfectly suits for creating protected areas.

User-friendly interface, high-quality materials, safety sensors, anti-tailgate detection, compatibility with any access control system, possibility of various biometric devices integration, unlimited number of lane configurations and high glass flaps - a perfect balance of style, performance and security.



HIGHER WINGS FOR HIGHER LEVEL OF PROTECTION

IDEAL SOLUTION FOR ANY DEMANDING SITE



Key features:

- BMDrive® - a reliable mechanism with a powerful BLDC gear motor ensures long-term, maintenance-free operation;
- The speed gate is equipped with a smart self-diagnostic system;
- An innovative controller with an OLED display and buttons allows for easy setup and configuration without the need for special programmers;
- Digital control of force and leaf speed, combined with safety sensors, prevents accidents and ensures the safety of individuals, even in cases of unauthorized passage;
- The sensor system enables the detection of individuals with luggage or allows for a free exit without the need for identification;
- Elegant cabinets come equipped with integrated LED lighting that displays the access status and card reader area;
- The housing design and top lid can be customized to meet specific preferences;
- Can be seamlessly integrated with any type of access control system;
- A wired remote control panel is included as part of the standard kit;
- Low power consumption;
- In the event of a power failure, the leaves can be manually opened (fail-safe).



Technical Specifications:


Model	Jetpan 500
Cabinet width, mm	239
Cabinet length, mm	1006
Cabinet height, mm	1520/1800
Passage width, mm	500
Opening/closing time, sec	0,7
Mechanism	BMDrive® servodrive (BLDC)
Blocking system	DeadLock®
Emergency mode (fire-alarm)	Free entry/exit (leaves are opened automatically)
Power fail	Fail safe (gates could be opened manually — standard)
MCBF, cycles	10 000 000

Electrical Specifications:

Maximum power consumption, W	160
Voltage	From the AC (100-240)V, 50/60Hz; from a DC source 12 V
Indication	DotLights®, RFIDLights®, EdgeLights® FloorLights®

Finishing

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316; Polished SS AISI 304; Polished SS AISI 316; Powder coated RAL

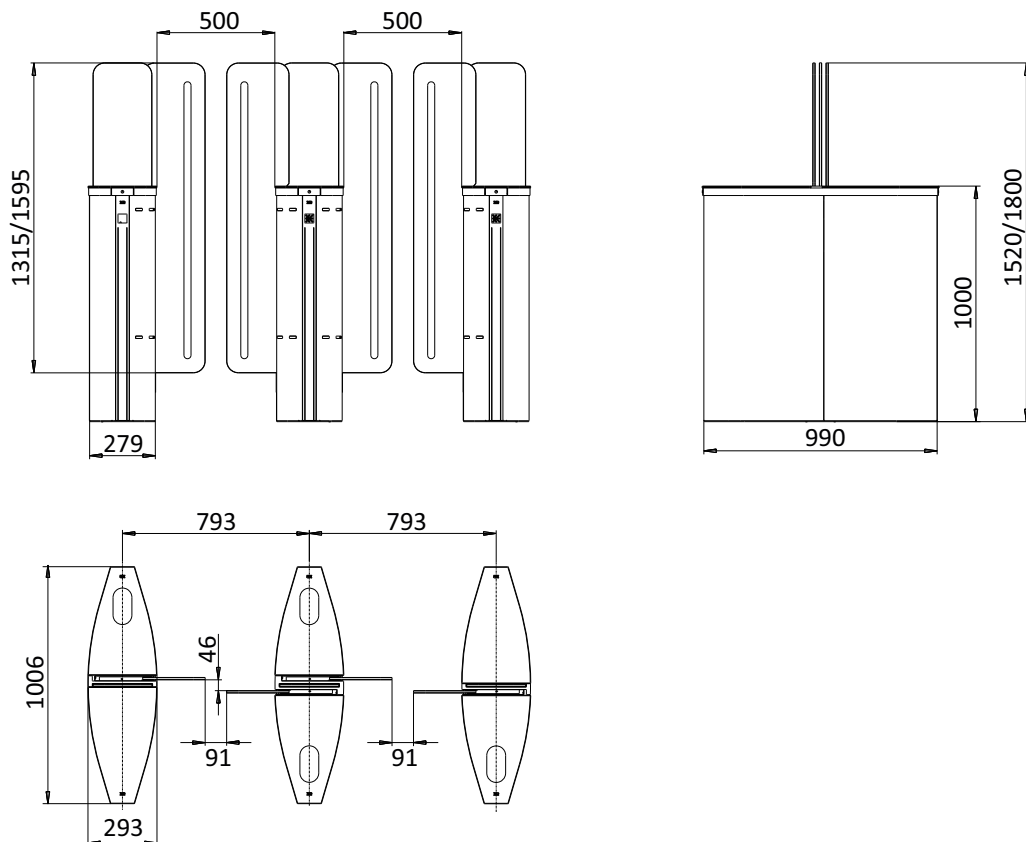

Dimensions for solid glass top lid

Specifications are subject to change without prior notice.

